EMA

Start Up Manual

SMART CEYA

Youth Activator

Models 1000
2000
3000

December 2007

General Instructions

CAREFULLY READ THE SAFETY INSTRUCTIONS AND KEEP THEM AS A REFERENCE THROUGHOUT THE DEVICE'S LIFE

IT SUPPLIES YOU WITH IMPORTANT INSTRUCTIONS REGARDING ITS USE AND THE SAFETY MEASURES FOR ITS INSTALLATION, USE AND MAINTENANCE

1. Once you've unpacked the device, make sure everything is intact. Make sure there is no visible damage that may have been caused by transport. In case of doubt; do not use the device and contact your distributor. All the packaging material (the plastic wrapping, the cardboard box, etc.) may be dangerous and must be kept out of children's reach.
2. Before connecting the device, make sure the indications you can find on the label correspond with your electricity network's characteristics. You can find the label beneath the ON/OFF button.
3. This device can only be given the use for which it has been designed, following the instructions, and exclusively in beauty centers and salons and under the supervision of qualified personnel. Any other use has to be considered incorrect and therefore dangerous. The manufacturer declines any responsability for damages caused because of an inappropriate, incorrect or unacceptable use of the device.
4. Should the device break down and/or function incorrectly, immediately switch it off and do not tamper with it. For any kind of repair, you must contact with your distributor or one of the authorized technical service centers only. Not complying with the previously exposed may alter the device's safety.
5. Before cleaning the device or before performing any kind of maintenance, disconnect the device by unplugging it.
6. Frequently check the device for signals of wear and tear. If you find any, or if the device has been used incorrectly, return the device to the provider before using it again.
7. Do not connect the device to the same circuit as your domestic equipment, such as AC's or others, which consume large amounts of energy.
8. Do no try to replace the network cable. If the cable is damaged and it needs to be replaced, contact your distributor or one of the authorized technical centers.
9. This device has not been designed for medical use in hospitals.

Very important: NEVER let children or handicapped persons use the device without supervision. NEVER introduce the device, the cables or the plugs in any kind of liquid. DO NOT use the device bare feet. DO NOT pull from the network cable when trying to unplug it. DO NOT leave the device to the elements (rain, sun, etc.)
Restricted use:
DO NOT use on persons with health issues, children or heath insensitive persons.
DO NOT use on persons suffering epilepsia
DO NOT use on persons suffering circulatory disorders
DO NOT use on persons with pacemakers or heart stimulators
DO NOT use on pregnant women
DO NOT use on persons with serious psychiatric disorders, venous pathologies, serious heart or kidney problems.
DO NOT use on persons with cutaneous infections.

Warning! It is not allowed to copy or reproduce any part of this manual without the manufacturer's written consent.

IMPORTANT INSTRUCTIONS: This device has been designed for professional beauty treatments and has been manufactured according to the current safety regulations regarding electrical beauty treatment devices.

The device carries an electronical temperature control system all through its resistance (ELECTROBLOCK®). If the device breaks down or stops functioning correctly, the patented automatic control system (ELECTROBLOCK®) immediately cuts off the electrical supply to the heat pannel.

THE MANUFACTURER CANNOT BE HELD RESPONSIBLE FOR DAMAGES OR ACCIDENTS CAUSED BY AN INAPPROPRIATE USE OF THE DEVICE.

Índex

Introduction	3
Chapter 1. Description of the device	4
Chapter 2. Safety	10
Chapter 3. Instalation	14
Chapter 4. User's Instructions	16
Chapter 5. Maintenance	21
Chapter 6. Accessories	24
Chapter 7. Assembly of the foot and the device	26

Introduction

CEYA SMART is an innovative radiofrequency device for beauty treatments.
This manual provides the CEYA-user with all the necessary information on how to use the device, the control pannels, safety measures, installation and maintenance of the device and it helps to use and to take care of the device, but it cannot replace an appropriate training in the appliance of radiofrequency in beauty treatments.

The manufacturer of the device offers training courses on how to use CEYA.
This user's manual includes the following information:

Chapter 1

Description of the device
Contains a general description of the different CEYA SMART subsystems and its technical specifications.

Chapter 2

Safety
Contains explanations and indications regarding the safety measures that should be taken when using CEYA SMART

Chapter 3

Installation
Explains the electrical and environmental requirements necessary for the installation of the CEYA SMART

Chapter 4

User's Instructions
Explains how to use CEYA SMART

Chapter 5

Maintenance
Gives a detailed explanation on the maintenance procedures for the device and its accessories.

Chapter 6

Accessories
Describes the accessories used with CEYA SMART

Description of the device

Chapter 1 includes a detailed description of the CEYA SMART device

1.1 Introduction to CEYA SMART.

CEYA SMART is a radiofrequency device with capacitive and coaxial coupling to the human body designed for beauty treatments. The diathermia through radiofrequency is produced through a high frequency electrical current which circulates through the human body. This kind of high frequency electrical stimulation does not generate any type of muscular or nervous response. It only produces a thermical effect according to the density of the circulating current. This way the device generates a temperature increase in a specific area which will produce Hyperthermia, the effect we are looking for.

The radiofrequency current and the human body are coupled by means of an insulated electrode, the active plate, which together with the body and the return electrode, the passive plate, forms a capacitive electrical circuit. This circuit allows for the radiofrequency current to pass through that part of the body comprised between the two electrodes. This is what we call capacitive coupling. The most important advantage of this type of coupling consists in the elimination of possible electric arcs which are produced when using non insulated electrodes. When non insulated electrodes generate electric arcs, the skin inevitably gets burned.

CEYA SMART has three independent outlets which have been insulated from one another. This configuration allows for a wide variety of different treatments.

CEYA SMART is a very advanced system controlled by a micro-processer, which controls the correct functioning of the device at any time. The user's interface consists in a monochrome graphic display of 240 x 128 pixels which shows the device's modes and paragraphs and a keyboard corresponding to the information shown on he displays which allows giving commands.

1.2 System Software

The software installed in CEYA SMART has 2 main functions:

To control the functioning of the device and to prevent potentially dangerous situations.
To allow for interaction between the user and the device.
To control all the device's parameters.

Accessories.

Allow for the application of the radiofrequency energy to the human body. There are two different accessories per outlet:

Active plate (fixed plates)
Passive plates (fixed plates)

When connecting them to the device and applying them to the human body, an electrical circuit is generated which enables treatments.

1.3 Dimensions and weight

Dimensions: 58 x 27,5 x 15,8 cm
Weight: 20Kg.

1.4 Specifications of the system

Electrical characteristics of the device:

Supply Voltage: 110/220V~
Nature of the supply voltage: Alternating – single paced (~).
Power supply frequency: 50/60 Hz..
Power consumption: ***SMART 1000: 300VA SMART 2000: 500VA SMART 3000: 700VA***

Characteristics of the radiofrequency output signal per channel:

Frequency of the signal: 1 MHz
Maximum output power: 90 W over a resistive charge of 500 ohm
Regulation of the output through modulation of the pulse width
Output voltage: 300 V efficient
Frequency of the control signal PWM: 500Hz.

Characteristics of the control unit:

Microprocessor: Atmel Atmega128
Timer: Quartz crystal 16MHz.
Monochrome display 40 x 128 pixels

Chapter 2

Safety

This chapter describes the safety measures regarding the use of CEYA SMART, with a special emphasis on electrical safety.

Safety warning.

All personnel in charge of the use or maintenance of the CEYA SMART ought to read this manual and should understand and know all the safety precautions to be taken before using the device.

2.1 In General

CEYA SMART has been designed to safely apply radiofrequency currents to the human body. With the appropriate use and maintenance, the device can be used by properly trained and qualified personnel, assuring their complete and total safety.
All personnel responsible for the use and maintenance of the device should be familiar with the safety instructions of this manual.
The most important matter should be the safety of the patient, the operator and other personnel.
During the design process of the CEYA SMART, special attention was paid to those elements assuring safety. We will now detail some of these safety mechanisms:

· Maximum levels of power density that can be considered safe.
· Security control button for the client.
· Continuous monitoring of the correct connection between accessories.
· Continuous monitoring of the key board.
· "Watch Dog" – software security timer, which controls the correct functioning of the software at any time.

2.2 Technical warnings and precautions

· The device can obly be used by qualified personnel.
· The user's instructions should be kept nearby the device.
· Read this manual carefully before installing and using the device.
· For technical assistence, contact the manufacturer or your authorised distributor only.
· The accessories can only be used with this device.
· Stop using an accessory as soon as it presents any kind of default.
· Regularly check the state of the accessories' cables.
· Do not use extension wires to connect the device to the network, make sure it has the right voltage.
· All maintenance and cleaning operations should be performed after the device has been disconnected from the electricity network.
· Any kind of tampering with the device will invalidate the warranty.
· The device should not be exposed to the elements.
· The manufacturer declines all responsability in case of an incorrect use of the device.
· The manufacturer and the distributor will only be responsable for the safety of the product if:
  -all the repairs, modifications or reconfigurations are performed by specifically authorized personnel
  -the device is being used by qualified personnel and according to the user's instructions
· The device should never be used in the presence of gases or inflamable liquids.
· Only personnel authorized by the distributor can offer technical service for the device, especially when it's necessary to open up the protective covers. This includes any kind of reajusting of the energy sources, the potency and control circuits, etc. Inside the device there exist dangerous voltages.
· The maintenance of the device should be performed when the device is disconnected from the electricity network. Performing maintenance tasks when the device is receiving energy may be dangerous for the user and / or damage the device.

2.3 Main precautions and warnings regarding the application:

· Should not be used on persons with internal electronical implants such as pace-makers
· Should not be used on persons with internal metal implants.
· Always to try to shorten the distance between the two plates as much as possible and avoid the heart being in the middle of both.
·Never put the plates close to metal elements such as rings and watches.
· The device should never be used on persons suffering infections.
In case of doubt, consult a specialist doctor.
· When applying, removing or moving plates, always make sure the potency has been put to zero and the outlets have been disactivated. If not, the skin might get burned.
·The plates should be used with the protective plastic covers delivered by the manufacturer

2.4 Contra-indications

The use of CEYA SMART is not indicated in the following cases:

· Pregnancy
· Metal protheses included in the electrical field
· Decompensated artheriopathies
· Malignant neoplasms
· Active infections
· Pacemakers.
· Heat insensitive persons

2.5 Electrical and mechanical safety.

Maintain all the covers and pannels of the CEYA SMART closed. Their removal will create a riskfull situation. Inside of the device there exist high voltages that can be dangerous. No pannel or cover can be taken away except by personnel authorized by the manufacturer. Never leave the CEYA SMART functionning, opened up or unattended during the maintenance of the system. The CEYA SMART weighs 20 Kg and can cause injuries if it's moved with the necessary precautions. The unit is earthed through the earth conductor of the network cable. This electrical earthing is fundamental in order to guarantee a safe use.

Autochecking

Each time the device is activated, it performs an automatical checking process of all the elements related to the system's safety. Once the device is functioning, it continuously monitors certain safety parameters, such as the correct connection of the accessories, the integrity of the keyboard and the correct functioning of the software.

2.6 Label

Model: **CEYA SMART 3000**
N/S: **S00000CH**

BIOINSIDE, S.L.U.
Sant Martí de l'Erm 22
08970 – Sant Joan Despí (Barcelona)

CE

220/110V~ 50/60Hz 600VA

Made in Spain Fuse: 3A/6A (5x20mm)

2.7 Classification of the device

· Protection against electrical discharges: Class I, type BF.
· Protection against the penetration of liquids: ordinary device.
· Device not valid for use in the presence of inflamable anaesthetic mixtures with air or nitrous oxide
· Operation mode: continuous.

Chapter 3

Installation

3.1 Delivered material

· CEYA SMART 1000/2000/3000
· 1/2/3 active plates
· 1/2/3 passive plates
· 1/2/3 protective hygienic covers made of polyurethane
· 1/2/3 protective hygienic covers made of polyurethane with a gel filling.
· 1 network cable for connection to the electricity network
· Safety button
· 1 user's manual
· 2/4/6 elastic straps 80 cm.
· 2/4/6 elastic straps 60 cm.
· 2/4/6 elastic straps 40 cm.
· Coaxial coupler 41 mm.
· Coaxial coupler 58 mm.

3.2 Positionng of the device

The device must be placed on a table (standard support in case of the 2000 and 3000 models) which is sufficiently stable and solid to carry the device's weight. It is important to make sure the table has the appropriate height in order to assure an ergonomic use of the device and its accessories.(We recommend the same height as the standard support)
The front feet of the device incorporate a mechanism that allows them to be elevated, thusly facilitating the access to the front screen, buttons and connectors.(Only on top of a table, never with the standard support of the 2000 and 3000 models).
Keep the device far away from heat sources. There must be enough space around the device in order to assure its correct ventilation, especially make sure to never obstruct the grids of the back and side pannels.

3.3 Electrical requirements

CEYA is delivered with the voltage corresponding to that of the local electricity network, according to the client's order. The device can be configurated in order to function with the following input tension:
Single-phased 230V~ +/-10%, 3A, 50/60Hz
Single-phased 110V~ +/- 10% 6A, 50/60Hz
It is possible to change the tension of the device through a mechanism located in the back pannel of the device.
The device is earthed through the earth conductor of the network cable which is connected to the electrical installation. An appropriate earthing is essential in order to assure a safe use of the device. The input lines must be free of tension or current peaks, tension drops or overcharges. The protector fuses in the devices are 6 A for a 10V~ tension or 3 A for a 220V~ tension. The device comes with one fuse. In case this one melts down it must be replaced by one with the same characteristics in order to assure safety and avoid the risk of a fire outbreak.

Warning
Make sure the CEYA has been configurated correctly according to your local electricity network tension.

3.4 Environmental requirements

Quality of the air

CEYA must be operated in a non-corrosive athmosphere. Corrosive materials such as acids can damage the electricity cables and the electronic components. Metal dust is destructive for electrical devices.

Temperature.

In order to assure CEYA functioning at its best, we recommend a room temperature of 20°C to 25°C and a relative humidity below 80%.

Chapter 4

User's Instructions

This chapter contains detailed instructions for the use of CEYA SMART.

Safety Warnings

Dangerous tensions exist inside the device! The devices pannels cannot be removed under any circunstances.

CEYA generates high tension radiofrequency energy. For a safe application, the active and passive plates must be applied correctly to the skin of the treatment area. An inappropriate positioning of the plates may cause skin burns.

Never use accessories that present any kind of defect, for instance: damage in the cable's insulation, the electrode's surface, the adherence of the materials of the passive and active plates to the silicone substract, etc. An inappropriate use of the device, with an excessively long treatment and/or excessively high potency levels can cause skin burns which may generate hypertrophia, atrophia or anormal pigmentation or a combination of these three effects

4.1 Displays and controls

CEYA SMART is controlled through the buttons of the front pannel. This display informs the user at all time about the state of the device and the actions that are possible at each moment.

Automatical recognition of the accessories.

CEYA SMART includes a technology that allows the device to recognize the accessories connected to its outlets. This function enables certain advanced options, which are detailed below:

It will only be able to activate an outlet if the latter shows a correct combination of accessories.

If any accessory is changed during the treatment, the treatment will automatically be detained.

**The connection of the accessory of your choice must be made while the device remains disconnected. Once the accessories have been connected, we can activate the device and the display will automatically detect the type of accessory that has been connected.*

1.5 Front panel

The front pannel enables an interface with the user and the connection of the accessories. This is showed in the following image

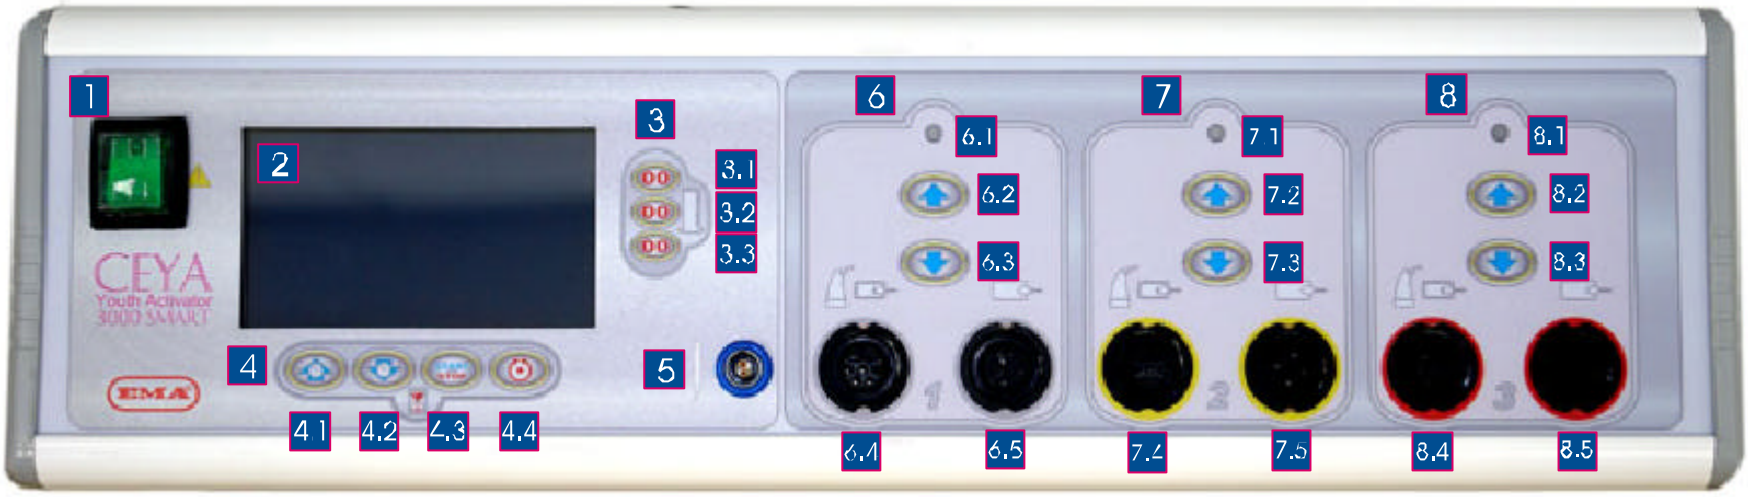

Elements of the front pannel

1 General switch

2 Graphic monochrome display 240 x 128 pixels

3 Reset key for the energy counters

- 3.1 Reset key for the energy counters - channel 1
- 3.2 Reset key for the energy counters - channel 2
- 3.3 Reset key for the energy counters - channel 3

4 Application control key

- 4.1 Key to increase treatment time
- 4.2 Key to decrease treatment time
- 4.3 START/STOP key to start or stop the activation of the outlets
- 4.4 Key to reset the treatment parameters

5 Connector for the safety control

6 Outlet number 1

- 6.1 Pilot light indicating the channel is active.
- 6.2 Key increase potency channel 1
- 6.4 Key decrease potency channel 1
- 6.5 Connector active plate channel 1
- 6.6 Connector passive plate channel 1

7 Outlet number 2

- 7.1 Pilot light indicating the channel is active.
- 7.2 Key increase potency channel 2
- 7.4 Key decrease potency channel 2
- 7.5 Connector active plate channel 2
- 7.6 Connector passive plate channel 2

8 Outlet number 3

- 8.1 Pilot light indicating the channel is active.
- 8.2 Key increase potency channel 3
- 8.4 Key decrease potency channel 3
- 8.5 Connector active plate channel 3
- 8.6 Connector passive plate channel 3

see 1.5

1.6 Back pannel.

The back pannel holds the connector to connect thenetwork cable to the electricity network. This connector includes the protection fuse. The back pannel also holds the air inlets for the ventilators which are protected with grids to assure safety.

4.2 Description of the displays

Figure 5.1 presents the logotype of EMA which appears when the device is activated, once the auto-checking has finished.

Figure 5.1.: Logotype de EMA

Elements of the treatment pannel

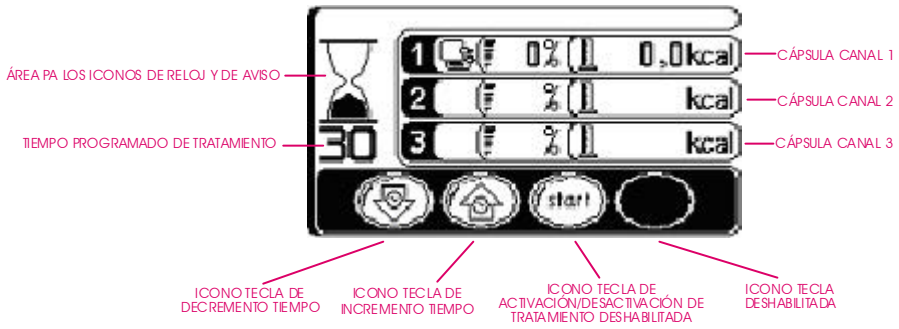

Figura 5.2: Pantalla de tratamiento.

Figura 5.2 shows an exemple of the treatment display with the accessories correctly connected to channel 1 and a treatment time that has been programmed to 30 minutes.

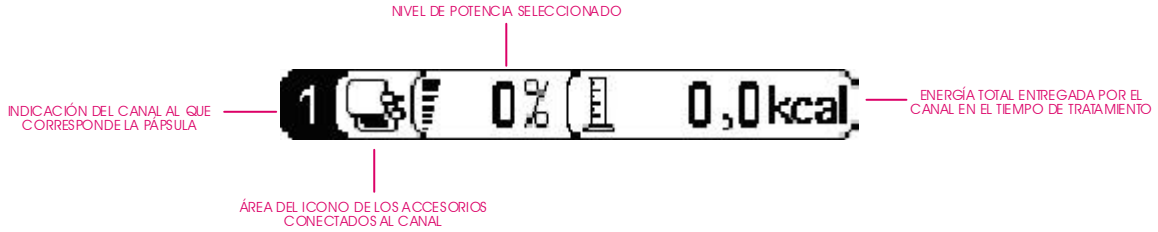
NIVEL DE POTENCIA SELECCIONADO
INDICACIÓN DEL CANAL AL QUE CORRESPONDE LA PÁPSULA
1 0% 0,0kcal
ENERGÍA TOTAL ENTREGADA POR EL CANAL EN EL TIEMPO DE TRATAMIENTO
ÁREA DEL ICONO DE LOS ACCESORIOS CONECTADOS AL CANAL

Figura 5.3: Detalle de la cápsula correspondiente al canal 1

1 *Timer.*

2 Safety control. Appears when the safety button is not being pressed.

3 *Alarm. Connection or disconnection of the accessory during the treatment.*

4 Error. Indicates the system has detected an error or a problem in the device's functioning.

5 Key to decrease the treatment time.

6 Key to increase the treatment time.

7 Key to start up the treatment.

8 Key to stop the treatment.

9 *Disabled key*

10 Key to reset all the parameters to their default values.

11 *Connected active plate and disconnected passive plate.*

12 Active and passive plates are connected correctly.

Table 5.2: Icones of the treatment display

4.3 User's instructions.

The only icons that are activated are those associated to the keys that can perform any action at that very moment.
The actions that are possible at each moment depend of the state of the device:

· *Accessories are connected.*
· *Safety button has been connected and is being pressed or not*
· *Treatment completed.*
· *Treatment in course*
· *Treatment paused.*
· *Reset to default parameters.*

Once the device has been activated and all the initial safety checkings have been done, the device shows a display with the EMA logotype (Figure 5.1). When pressing a key the device passes to the treatment display (Figure 5.2).

The basic requirement to start up a treatment is the correct connection of accessories to one of the device's outlets.
Only the outlets with correctly connected accessories can be activated. The outlets that have no accessories connected to them or that have wrongly connected accessories, because one is missing or the connector is not correctly inserted, will remain disabled and will not respond to a possible potency increase in the channel.

Once accessories have been connected correctly in at least one outlet of the device, it is possible to change modes. At this moment it is possible to adjust the programmed treatment time with the buttons to increase or decrease time (Buttons 4.1 and 4.2. Figure 1.2), or to start a treatment pressing the START/STOP button (button 4.3. Figure 1.2).

Once the treatment has started, it is possible to adjust the potency of each outlet with the corresponding increase and decrease buttons. (Figure 1.2. Outlet 1: Buttons 6.2 and 6.3. Outlet 2: Buttons 7.2 and 7.3. Outlet 3: Buttons 8.2 and 8.3).A green pilot light (Figure 1.2. Outlet 1. Pilot 6. Outlet 2. Pilot 7. Outlet 3. Pilot 8.) will lighten up in each outlet when energy is being delivered. The intensity of the lights depends of the selected potency.

Throughout the application of energy, the device will measure the total energy delivered to all of the active outlets, showing the figures in the capsule of the corresponding channel. The figure is expressed in kilocalories.

While the device is working; only one action is possible: you can pause the treatment by pressing the "START/STOP" button (4.3. Figure 1.1). When pressing it, the device will enter the pause mode, enabling the following actions:

· Continue the treatment, maintaining the same potency and time-related parameters as before the pause (4.3. Figure 1.1).
· Reset all the energy counters (Buttons 3.1, 3.2 and 3.3 Figure 1.2).
· Restart the treatment, returning all the parameters to their default values (Button 4.4. Figure 1.2).

During the treatment, no accessory should be disconnected. When disconnecting an accessory during the treatment, the treatment immediately comes to a stop and an alarm icone appears in the display (Icone nº 3. Table 5.1) and the device emits a sound signal. Once the device has entered in this state, it is not possible to return to the treatment and the only possible action is the start up a new treatment.

4.4 Safety command.

The safety command is an element that requires pressing a button in order to activate the outlets, allowing the patient to *immediately detain the treatment in case of an emergency.* When the button is connected but not being pressed, an informative icone appears on the display (icone n° 2 table 5.1) and it is not possible to activate the outlet because the "START/STOP" button remains disabled. The option to activate the outlets will only be available while the safety button is being pressed.

If during treatment the safety button is let go off, the treatment will be automatically stopped and the device will emit a sound signal and an informative icone will appear on the display (Icone n° 2. Tabel 5.1). If this occurs, the outlets will not activate when pressing the safety button again: the device will remain in a state of pause and it will take the operator's intervention in order to deblock the treatment by pressing the START/STOP button. (4.3. Figure 1.1)

Chapter 5

Maintenance

5.1 General ideas

CEYA requires the following periodical maintenance:

Before starting a treatment, the isolating material of the active plate must be checked carefully for imperfections, damages to the surface, scars in the isolation or ant other type of imperfection. Do not use the active plate if you find any kind of damage to its surface. Before starting the treatment, the cables and connectors of the active and passive plates should be checked. Do not use them if you find any kind of damage and replace them with impeccable accessories.

After each treatment the active and passive plates should be cleaned carefully. This way you will enlarge their life expectation. Do not use agressive products such as acids, ammonia, etc. to clean the outside of the device.

We recommend you regularly inspect the device and its components. Contact you distributor whenever you detect any kind of anomaly.

Warning

The CEYA system cannot be repaired by the user. Any repair has to be done by the manufacturer or authorized personnel.

5.2 Time schedule for maintenance and calibration

In the following schedule are detailed the regular maintenance operations required by CEYA.

Task	Frequency	Done by
Cleaning the application electrodes	After each treatment	User
Checking the isolation of the active and passive plates	Before each treatment	User
Checking the cables and connectors of the accessories	Before each treatment	User
Visual check-up of the central unit	Monthly	User
Checking the configuration and the calibration of the device	In case of irregular behaviour	Bioinside, S.L.

5.3 Supply of technical information.

Upon request, plans of circuit boards, lists of components, descriptions, calibration instructions and other information will be supplied to appropriatly qualified technical personnel in order to help them repair those parts of the device the manufacturer considers repairable.

5.4 Manufacturer's liability

BLONSIDE, S.L. is responsable for the safety, re-liability and functioning of the device, only when:

· assembly, amplification, adaptions, modifications or repairs are done by personnel authorized by Blonside, S.L.

· The electrical installations of the corresponding rooms where the device is connectged meet the appropriate requirements.

· The device has been used according to the instructions detailed in this manual.

All responsability is declined in case of damaged caused to persons or to objects as a consequence of the incorrect use of the device, failure to maintain it or an inappropriate maintenance or the failure to observe the indications detailed in this manual.

5.6 Warranty

The CEYA device remains under warranty for a period of 12 months after its purchase, except in case of manipulations, interventions or interferences performed by non-authorized personnel or any kind of negligence in the use of the device.

The warranty is limited to the free repair of the device and the replacement of those pieces in which Blonside S.L.'s qualified personnel has found manufacturing defaults.

The warranty does not include those pieces subject to wear and tear because of normal use or those pieces damaged after an incorrect use or an inappropriate maintenance.

The warranty does not cover repairs consequence of a mechanical shock, natural disasters, defaults in the electrical installation or an inappropriate use. In the same way, any kind of manipulation, maintenance and/or repair performed by non-authorized personnel will automatically lead to the loss of warranty.

5.7 Technical Assistence

For any additional information on the use of the device and / or to ask for technical assistance; please contact us directly:

BIOINSIDE, S.L.U
C/ Sant Martí de l'Erm, 22
Polígono Industrial Font Santa
08970 Sant Joan Despí (Barcelona). España.

Teléfono: +34 93 477 42 62
Fax: +34 93 477 42 90

Accesories

	JAR OF GEL	5112016
	NETWORK CABLE	210054
	ELASTIC STRAPS	5111028 5111029 5111030
	CORPORAL COAXIAL COUPLER	5111091
	FACIAL COAXIAL COUPLER	5111092
	PASSIVE PLATE	5100087
	ACTIVE PLATE	5100086
	SAFETY BUTTON	5112019

5100060	5111013	5100010	5111037

Assembly of the foot

mod. 2000/3000

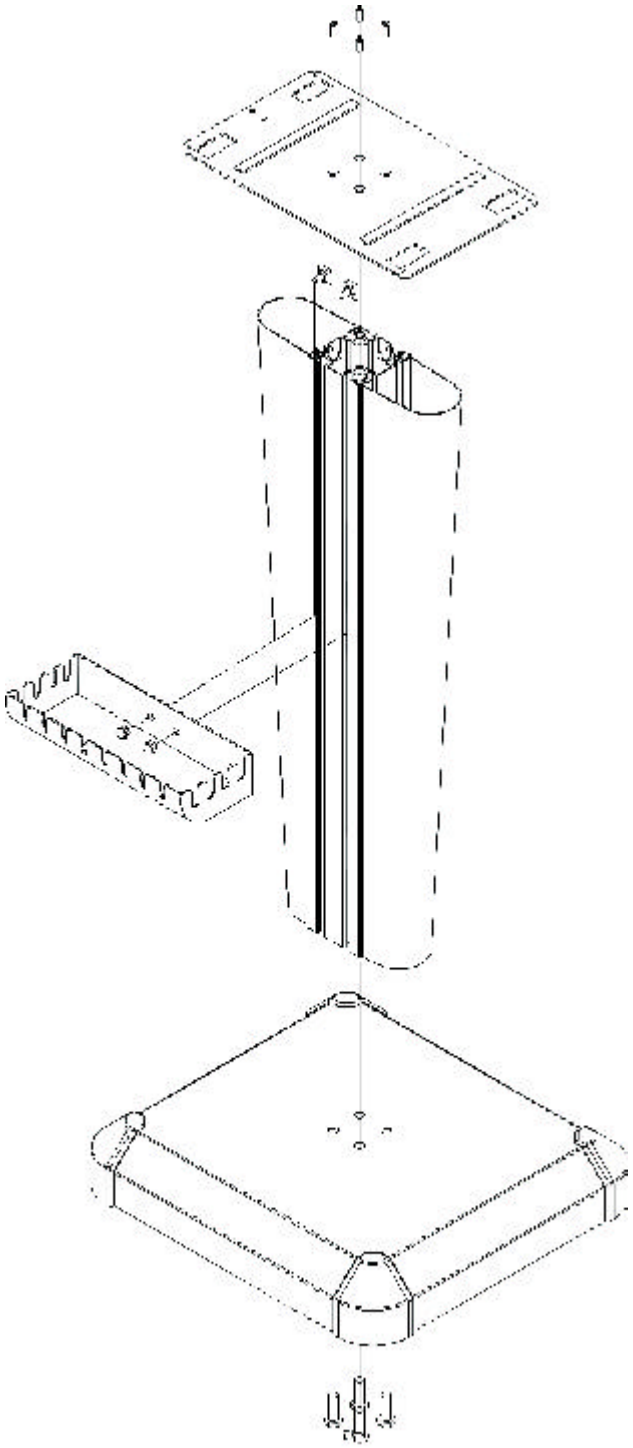

Assembly of the device with foot

mod. 2000/3000

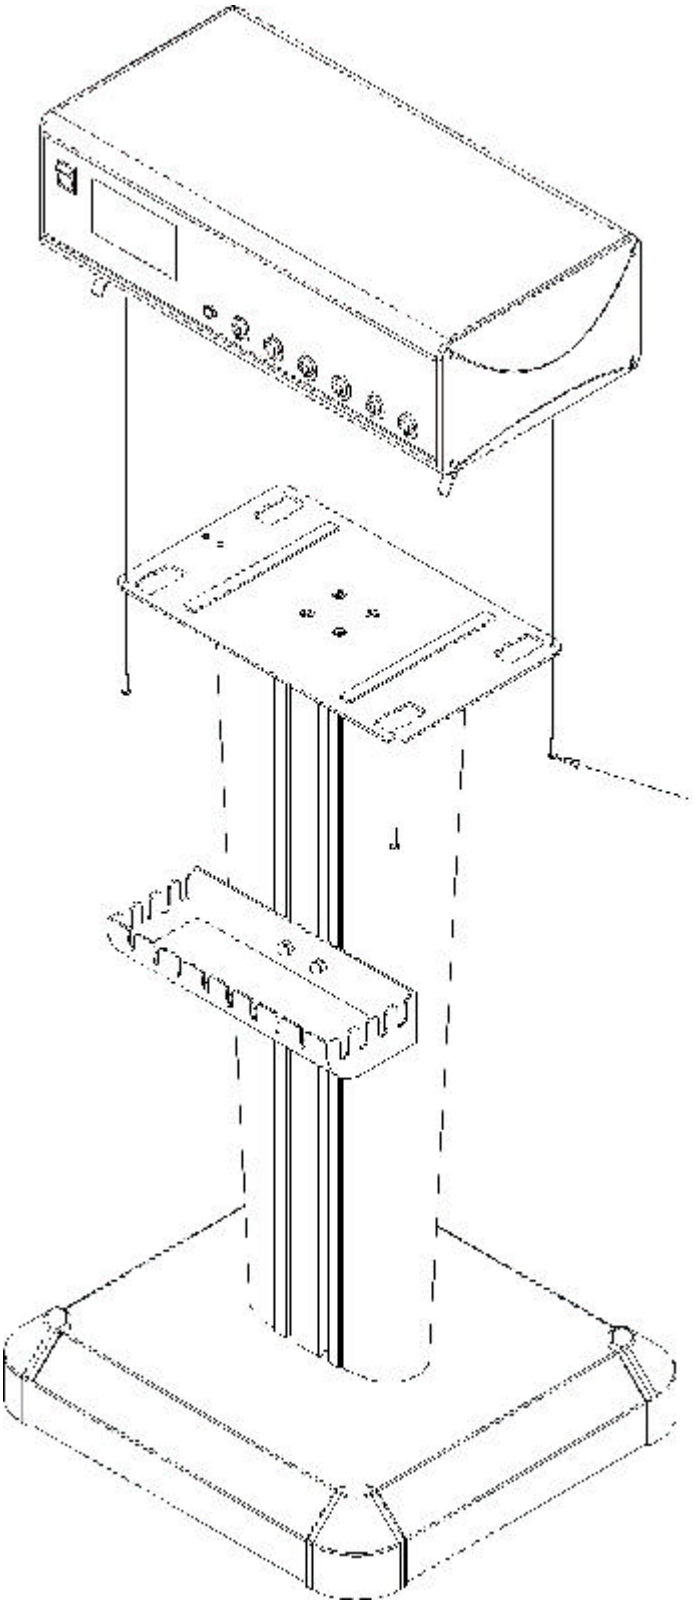

DECLARACIÓN DE CONFORMIDAD

DECLARATION OF CONFORMITY

89/336/CEE
73/23/CEE

ENERO 08
JANUARY 07

Nombre del Fabricante: *Manufacturer name:*	***BIOINSIDE INVESTIGACIÓN Y TECNOLOGÍA.SLU***
Dirección del Fabricante: *Manufacturer address:*	***SANT MARTÍ DE L'ERM 22 08970 SANT JOAN DESPÍ (Barcelona) - SPAIN***
Declara que el producto: *Declares that the product:*	**Electrocosmético** ***Electrocosmetic***
Nombre del producto: *Name of the product:*	**SERIE CEYA SMART**
Marca: Brand:	EMA
Cumple con la normativa: *Accomplishes normative:*	**CE**
Seguridad Eléctrica: *Electrical Security:*	CLASE I TIPO BF UNE EN 60601
Compatibilidad Electromagnética: Electromagnetic Compatibility:	

EN 61000-3-2, EN 61000-3-3, EN 50081-1, EN 55011, EN-5002-1, EN 61000-4-2, EN 61000-4-2, EN 61000-4-3 + ENV 50204, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11.

Fdo. Eulalia Jaime Ureña

NOTES

NOTES

NOTES

EMA
P.I Fontsanta. C/ Sant Martí de l'Erm 22
08970 Sant Joan Despí (Barcelona)
telf.93 477 42 62 - fax. 93 477 42 90